

Build in Pull Up Resistor, CC6112 Chopper Stabilized, High Precision, Unipolar Hall Effect Switch

General Description

CC6112 (unipolar Hall effect sensor IC) is fabricated from advanced BICMOS technology, which has extremely temperature-stable and stress-resistant performance, especially suited for operation over extended temperature ranges (up to 150°C). CC6112 use Dynamic Offset Cancellation and Crosschip patented temperature compensation technology, which reduces the residual offset voltage normally caused by package stress, temperature dependencies and thermal stresses, etc..... make product has extremely high consistent on Magnetic sensibility.

CC6112 includes a voltage regulator, a Hall-voltage generator, a small-signal amplifier, chopper stabilization, a Schmitt trigger, and a short-circuit protected output with pull-up resistor. A south polarity magnetic field of sufficient strength is required to turn the output on (CC6112TO). A north polarity field of sufficient strength is necessary to turn the output off (CC6112TO). A build in regulator permits operation with supply voltage in the range of 2.5~28V.

CC6112 is available for TO-92S and TSOT23-3 packages. The operating temperature range is from -40~150°C.


Features

- ◆ Operation Voltage Range: 2.5~28V
- ◆ Reverse Supply Voltage Protection: -40V
- ◆ High Chopper stability with good consistent
- ◆ Over Voltage Protection: 30V
- ◆ Superior Temperature Stability, higher to 150°C
- ◆ Output Short-circuit Protection (30mA)
- ◆ Small Package Size (TO-92S / TSOT23-3 package)
- ◆ Build in pull up resistor
- ◆ Solid-state Reliability
- ◆ HBM ESD 4000V

Application

- ◆ BLDC Motor Commutation
- ◆ Speed Detection
- ◆ Linear Position Detection
- ◆ Angular Position Detection


Function Block Diagram

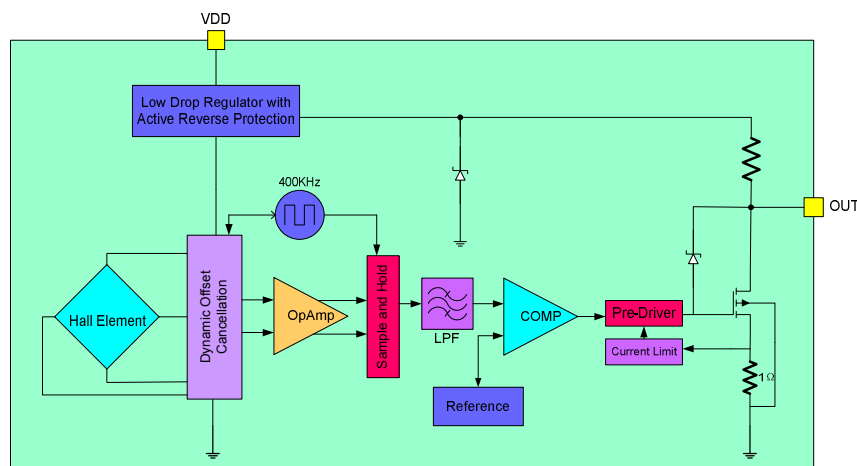

Ordering Information


Part No.	Packing Form	Package Code
CC6112TO	bulk, 1000 pcs/bulk	TO (TO-92S)
CC6112ST	tape reel, 3000 pcs/reel	ST (TSOT23-3)

Output vs. Magnetic Pole

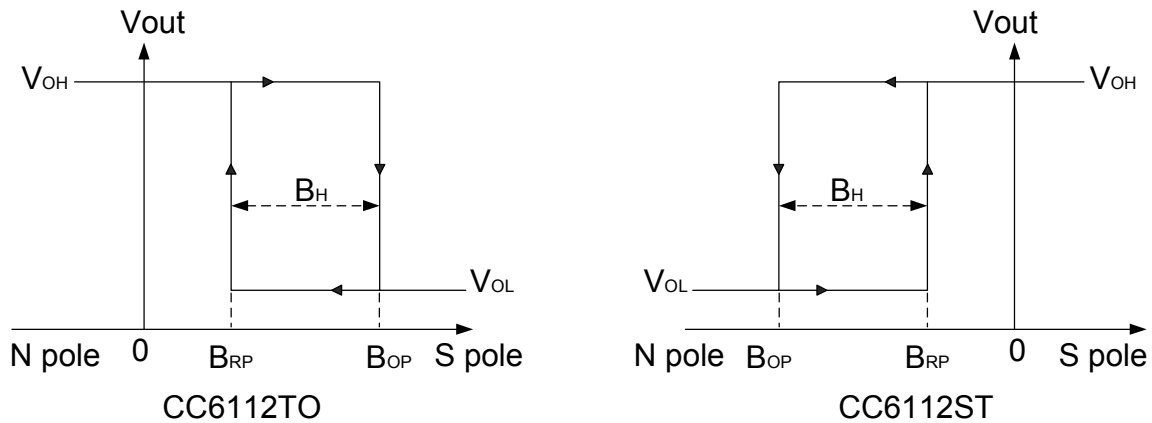


Note: Magnetic field need to be settled to top marking direction

PIN Configurations



TSOT23-3

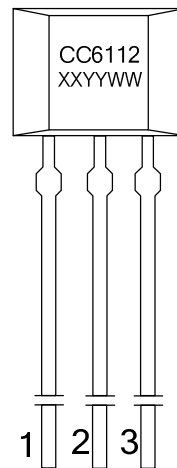

TO-92S

Pin Name	Number(TO-92S)	Number(TSOT23-3)	Function
VDD	1	1	Supply Voltage
GND	2	3	Ground
OUT	3	2	Output

Absolute Maximum Ratings

Parameter	symbol	value	unit
Supply Voltage	V_{DD}	30	V
Reverse Voltage	V_{RDD}	-40	V
Continuous Output Current	I_{OUT}	30	mA
Output Breakdown Voltage	V_{OUT}	30	V
Junction Temperature	T_J	150	°C
Operation Temperature	T_A	-40~125	°C
Storage Temperature	T_S	-50~160	°C
Magnetic Flux Density	B	Unlimited	Gauss
ESD Susceptibility	HBM	4000	V

Note: Exceeding the absolute maximum ratings may cause permanent damage. Exposure to absolute-maximum rated conditions for extended periods may degrade device reliability.

Electrical Parameters ($V_{DD}=12V$ @ 25°C room temperature, unless specified otherwise)


Parameter	Symbol	Condition	Min	Typ.	Max	Unit
Supply Voltage	V_{DD}	-	2.5	-	28	V
Supply Current	I_{DD}	25°C, $V_{DD}=12V$	-	2	-	mA
Output V_{SAT} (sink)	V_{SAT}	$I_{OUT}=20mA$	-	-	0.4	V
Output Current Limit	I_{LIM}	-	30	-	60	mA
Output Rise Time	t_r	$R_L=820\Omega$, $C_L=20pF$	-	0.2	-	us
Output Fall Time	t_f	$R_L=820\Omega$, $C_L=20pF$	-	0.1	-	us
Reverse Current	I_{RDD}	$V_{DD}=-40V$	-	-	-5	mA
Pull Up Resistor	R_{PULLUP}			15		k Ω

Magnetic Parameters

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
Operate Point	B_{OP}	25°C	30	40	50	Gauss
Release Point	B_{RP}	25°C	20	30	40	Gauss
Hysteresis	B_{HYS}		5	10	15	Gauss


Note: 1mT=10Gauss=100e

Typical Application Circuit

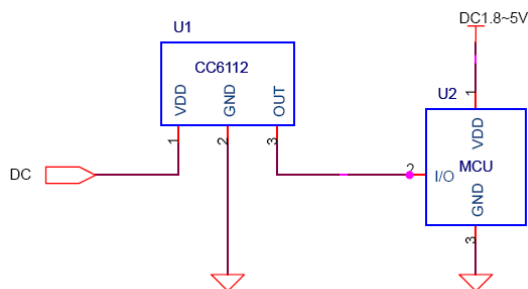


CC6112 Application


Waveform

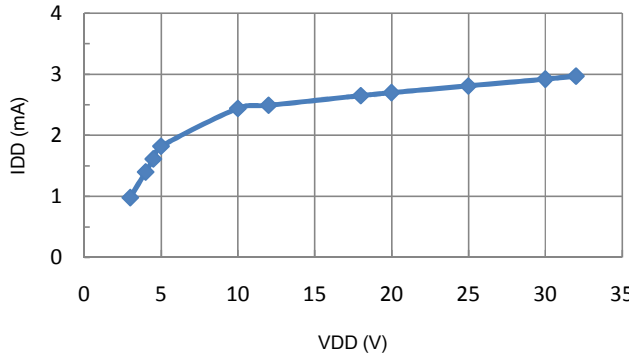

IDD vs. VDD

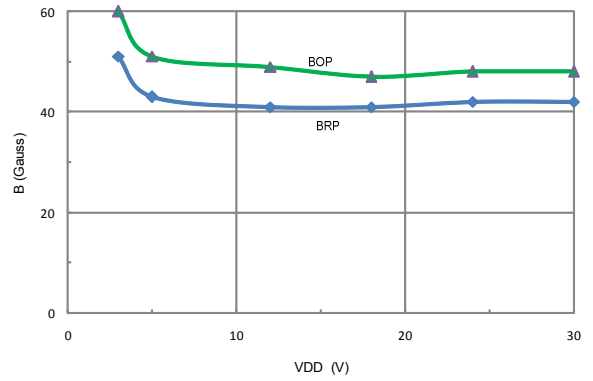


B vs. VDD

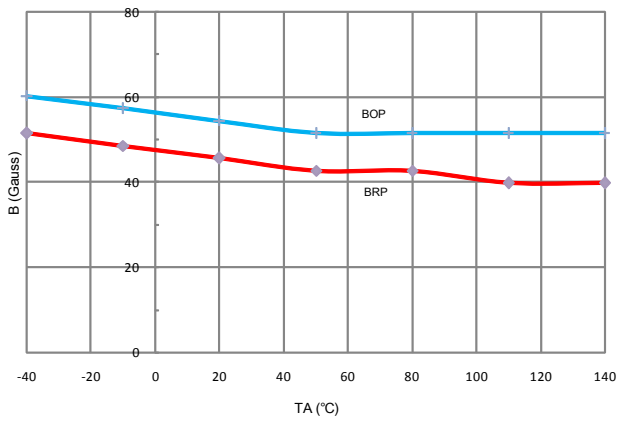

B vs. T_A

Package Informations

TO-92S package

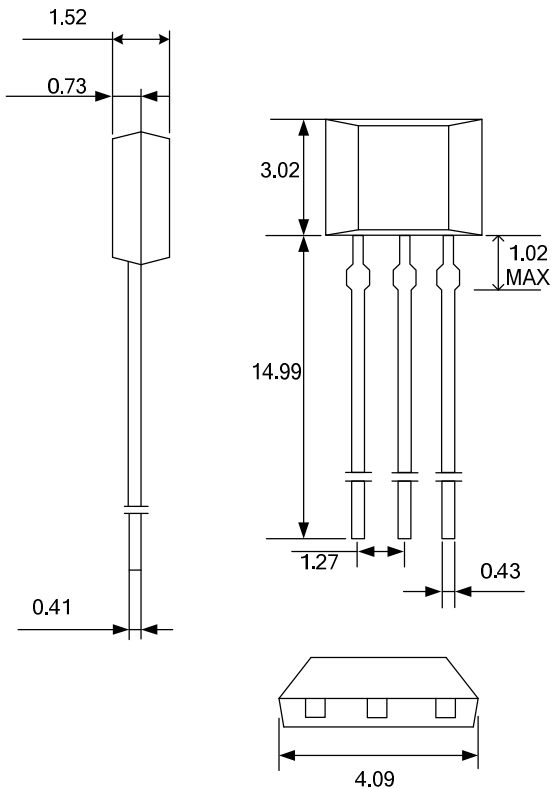

Notes:

All dimensions are in millimeters

Marking:

1st Line: CC6112 - Name of the device


2nd Line: XYYWW

XX – assembler code




YY - assembly year (last 2 digits)

WW - assembly week number


Hall Plate Location

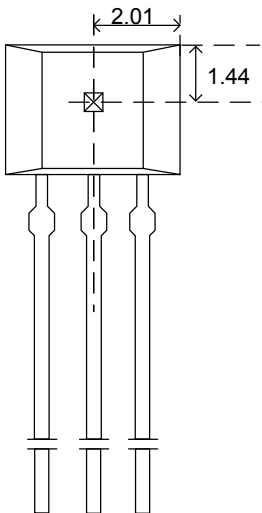

TSOT23-3 package

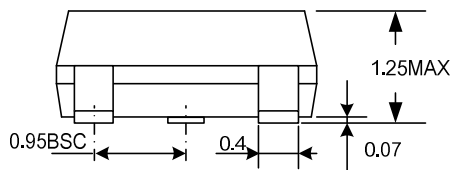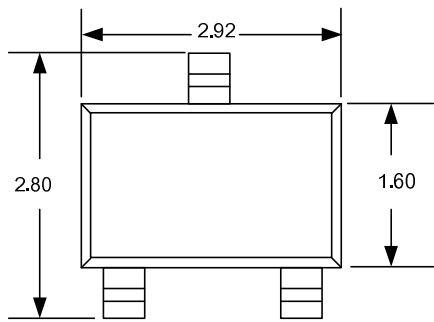

Hall Plate Location

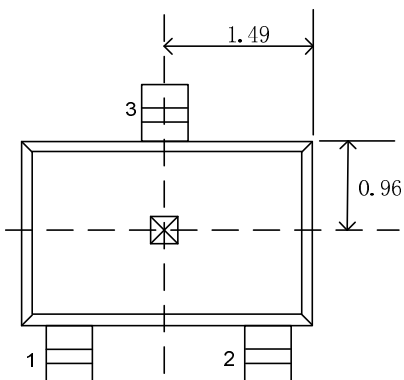

Notes:

1. All dimensions are in millimeters

Marking:

1st Line: 6112 - Name of the device